

ABESTORM VERSATILE & NEGATIVE AIR SCRUBBER

Filteair HEPA 550



Control Panel



Proven Performance

- ◆ The Abestorm Filteair HEPA 550 air scrubber, with the smallest and lightest design, is unbeatable compared with other brands in removing airborne miscellaneous debris at 0.3 microns in size, plant spores, pet dander. Pre-filter, HEPA filter, and activated carbon filter are all adopted in the Filteair HEPA 550.
- ◆ The Filteair HEPA 550 is absolutely powerful in cleaning contaminated air with a pre-filter and activated carbon filter capturing larger particles and the HEPA filter drawing in smaller particles.
- Filteair HEPA 550 can clean air horizontally and vertically with an electricity consumption of no more than three amps. Filteair HEPA 550 can produce 550 CFM airflow volume at its peak, virtually absorbing all hazardous particles from the air.
- During restoration work and drying after water damage, the driving airflow can stir up particulates and particles adhering to the carpet or other materials. Then those dirty particles can be filtrated by the device with clean, odor-free air.

Features

- ✓ indicates when the primary (HEPA) filter needs to be changed
- ✓ Plug up to three units together for a total of 1650 CFM on one 15 amp circuit
- ✓ Size 2 in" Smaller than competitive units
- ✓ Weighs 6.0 lbs less than competitive units
- ✓ More Effective than competitive unitsSize
- ✓ Long-life Maintenance-free Bearing Motor
- ✓ Low noise, quiet operation
- ✓ Both Inlet and outlet can be ducted.

Replacement Parts

- Switch, On-Off-On
- Outlet.GFCI.15A
- Grill Exhaust
- Blade&Motor
- Pre-Filter

- Activated Carbon Filter
- HEPA 550 Filters
- LayFlat Ducting
- Sto & Go Vortex Ducting

Specifications

Power 2.5A (115V/60HZ) Cord 23 ft Power Cord Sound Pressure Level <65DBA		Duct Sizes Intake Intake: 16 in.	Duct Sizes Outlet Outlet: 8 in. Airflow 270~550CFM Dim(W x H x D) 24.8 x 21.6 x 14.5in
		Outlet 15A UL Rated GFCI Duplex Receptacle	
		Weight 39lbs	
Size For 800 sq.ft	•	Loading Quantity 20': 185 Sets/40': 320 Sets/40'HQ: 470 Sets	

Recommended Use

Recommended use(s) of on-board duplex GFCI are shown. Note: Standard 115VAC electrical outlets. (GFC is not available for 220/240V)



Application:

- Filteair HEPA 550, a versatile air scrubber and negative air machine that can effectively complete your water damage restoration tasks, fire damage restoration, dust control, odor control, and sewage remediation
- Water Damage In a standard Category 1water damage situation place the Filteair HEPA 550 in the middle of the affected area. Air movers can stir up particles into the air. The HEPA 550 can reduce parole levels by filtering them in the restoration process.
- Space sealing prevents the spread of dust. Professionals with specialized remediation techniques use the Filteair HEPA 550 can bring about a striking effect of air cleaning.
- Formally Trained Remediation Professionals run the Filteair HEPA 550 as a negative air machine
 without interruption for the duration of every remediation job. The HEPA550 can filter up to 99.96% of
 particles with 0.3 microns or larger size.
- Manifold Filters Besides the standard prefilter and HEPA filter, Filteair HEPA 550 is also equipped with
 an activated carbon filter which can capture a wide variety of volatile organic compounds(VOC's),
 including sot and smoke, food odors fume from paint and paint times, sewer odors, and many other
 compounds individually wrapped filters with pellets ensure the maximum airflow and maximum
 contact while minimizing filter dust.
- + Restoration Works
- + Confined Areas
- + Construction Sites
- Crawl Space&Basement
- + Fire Departments+ Industrial Cleaning

- + Tunnels
- + Grinding Works


+ Dust Control


+ Odor Control

- + Welding Booths
- + Sewage Remediation

CADR: Volume of cleaner air delivered per minute

The highest CADR numbers belong to air scrubbers that combine high filtration efficiency, high airflow, and low-pressure drop.

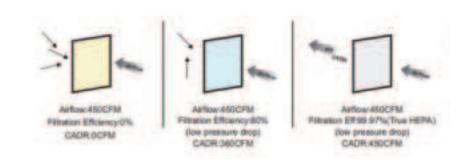





© Tel: (888)276-9833

⋈ sales@abestorm.com

